



(43) International Publication Date
20 January 2005 (20.01.2005)

PCT

(10) International Publication Number
WO 2005/006544 A1

(51) International Patent Classification⁷: H03F 3/45

(21) International Application Number:
PCT/IB2004/051064

(22) International Filing Date: 30 June 2004 (30.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03102073.8 10 July 2003 (10.07.2003) EP

(71) **Applicant** (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N. V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and

(75) **Inventor/Applicant (for US only):** MILANESI, Andrea [IT/DE]; c/o Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).

(74) Agent: MEYER, Michael; Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: OPERATIONAL AMPLIFIER WITH CONSTANT OFFSET AND APPARATUS COMPRISING SUCH AN OPERATIONAL AMPLIFIER

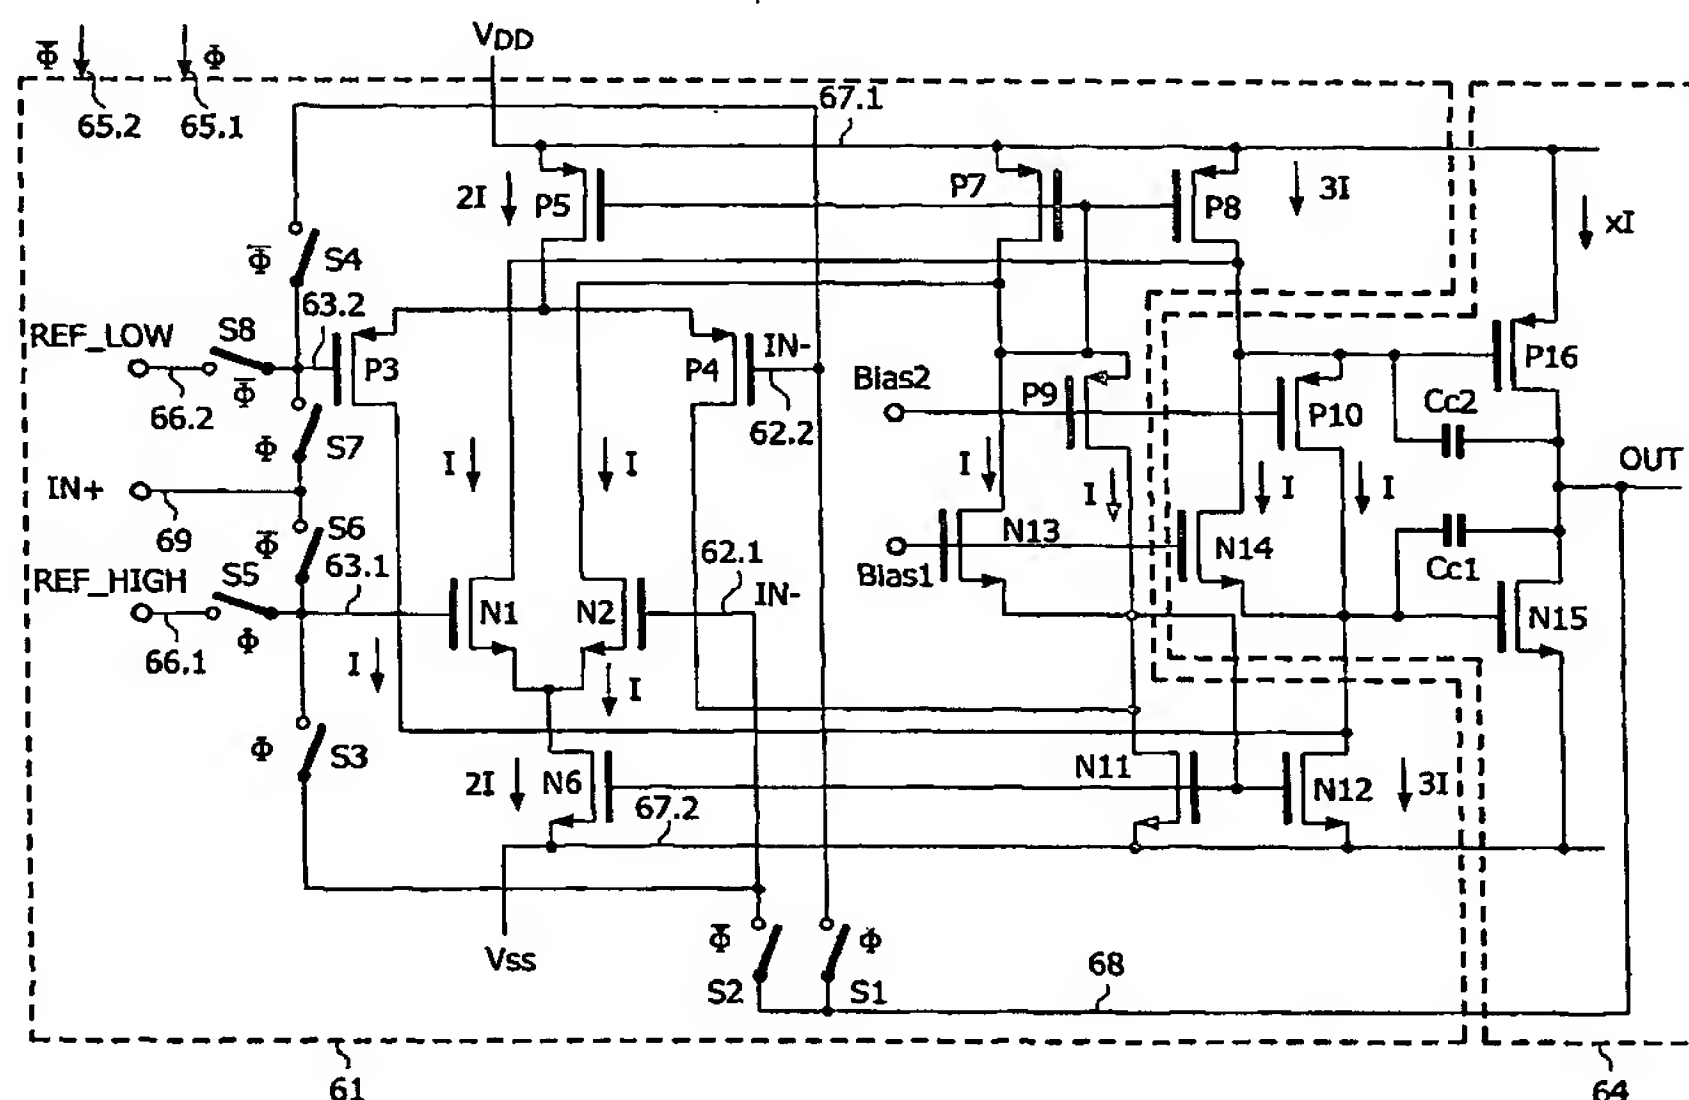

(57) Abstract: Apparatus (80) comprising an input stage (61) with an NMOS transistor doublet having a first differential input for receiving input signals, and a PMOS transistor doublet having a second differential input for receiving input signals. The apparatus (80) further comprises switching means for receiving and selectively directing analog input signals either to the first differential input or to the second differential input. The means are controlled by a switching signal (ϕ, ϕ) in a manner to keep the ratio of the transconductance of the NMOS transistor doublet and the transconductance of the PMOS transistor doublet constant.

WO 2005/006544 A1